



Precision Type Adjusting Hoses(Set)

Pneumatic tube Hoses
D5


Code	Type	Material	Color		Applicable Fluid	Environment Admitted	
			Pipe Body	Connector/Nozzle			
J-XWX01	Standard	POM	Navy Blue	Orange	Air, Water, Oil, Alcohol, Detergent, Etc	Chemical, Oil and Drug Resistance	
J-XWX02							Threaded Male Valve
J-XWX03							Threaded Female Valve
J-XWY11	L-Shaped	POM	Navy Blue	Orange	Air, Water, Oil, Alcohol, Detergent, Etc	Chemical, Oil and Drug Resistance	
J-XWY12							Threaded Male Valve
J-XWY13							Threaded Female Valve




Inventory

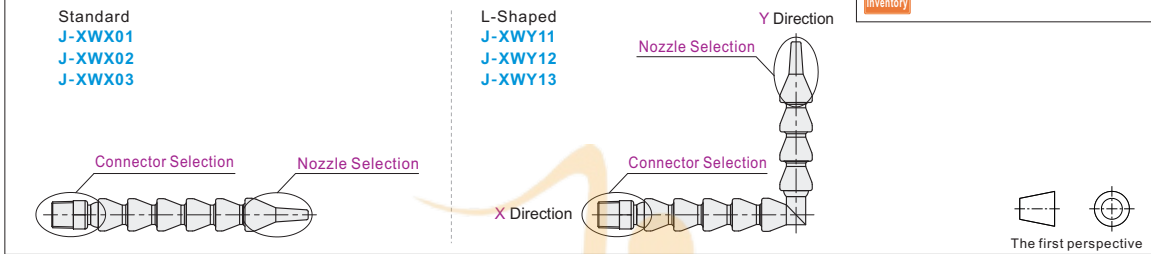

Pipe Body



Connector Selection (Table 1)

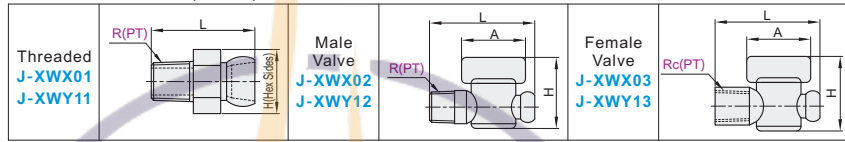

Pipe Body

Applicable Pipe Dia.	A	B	D	D ₁
2(Ø6.3)	14.85	20.1	12.53	16
3(Ø9.5)	17.3	24.9	16.9	20.4
4(Ø12.7)	21.1	30.1	21.53	25

Threaded

Applicable Pipe Dia.	R(PT) Thread Size	L	H
2(Ø6.3)	1(R1/8)	26.3	14
	2(R1/4)	26.4	14
3(Ø9.5)	3(R3/8)	32	18.8
	4(R1/2)	33	20.8
4(Ø12.7)	3(R3/8)	38.3	18.8
	4(R1/2)	38	20.7


Male Valve

Applicable Pipe Dia.	R(PT) Thread Size	L	A	H
2(Ø6.3)	2(R1/4)	40.1	27.5	31.1
	3(R3/8)	48.5	24.8	33.4
4(Ø12.7)	4(R1/2)	60.7	34.5	40.85

Female Valve

Applicable Pipe Dia.	R(PT) Thread Size	L	A	H
2(Ø6.3)	2(Rc1/4)	44.8	27.5	31.1
	3(Rc3/8)	50.2	24.8	33.5
4(Ø12.7)	4(Rc1/2)	63.4	34.5	40.6

Nozzle Selection (Table 2)

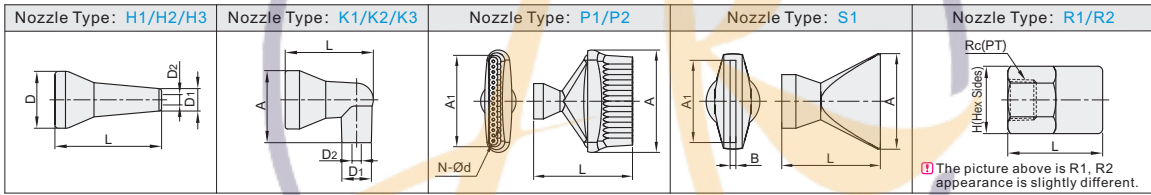

Nozzle Type: H1/H2/H3

Applicable Pipe Dia.	H1				H2				H3			
	L	D	D ₁	D ₂	L	D	D ₁	D ₂	L	D	D ₁	D ₂
2	30.3	15.9	3.90	1.5	30.1	15.9	7.65	3.1	35	15.88	9.93	6.3
3	32.3	21.0	10.11	6.3	39.4	21.0	12.38	9.6	32.80	21	14.44	12.0
4	37.3	25.0	10	6.2	37.5	25.0	12.30	9.7	37.75	25	16.60	12.6

Nozzle Type: K1/K2/K3

Applicable Pipe Dia.	K1				K2				K3			
	L	A	D ₁	D ₂	L	A	D ₁	D ₂	L	A	D ₁	D ₂
2	24.8	19.8	4.1	1.8	25.4	19.8	5.6	3.0	26.6	20.0	9.0	6.1
4	35.8	30.0	9.4	6.8	37.3	30.5	12.4	9.5	39.0	30.6	15.3	12.6

Nozzle Type: P1/P2

Applicable Pipe Dia.	P1					P2				
	L	A	A ₁	N	d	L	A	A ₁	N	d
2	45.80	46.8	39.78	16	1.0	45.8	46.9	41	16	1.5
4	58.85	70.0	65.20	20	1.8	—	—	—	—	—

Nozzle Type: S1

Applicable Pipe Dia.	S1			
	L	A	A ₁	B
2	29.5	28.6	25.0	1.7
3	39.0	34.2	32.1	3.2
4	50.1	50.1	47.3	4.4

Nozzle Type: R1/R2

Applicable Pipe Dia.	R1			R2		
	L	H	Rc(PT)	L	H	Rc(PT)
2	20.8	16.1	Rc1/8	24.9	16.7	Rc1/4

Standard

Code	Part Number	Applicable Pipe Dia.	Pipe Body Color	Pipe Body Number of Links	Connector Selection (See table 1 above)		Nozzle Selection (See table 2 above)										
					Threaded	Male Valve/Female Valve	H1	H2	H3	K1	K2	K3	P1	P2	S1	R1	R2
J-XWX01	2(Ø6.3)	(Navy blue)	0~30	1(R1/8)	2(R1/4)	2(Rc/R1/4)	H1	H2	H3	K1	K2	K3	P1	P2	S1	R1	R2
J-XWX02	3(Ø9.5)			3(R3/8)	4(R1/2)	3(Rc/R3/8)	H1	H2	H3	S1							
J-XWX03	4(Ø12.7)			4(Rc/R1/2)	H1	H2	H3	K1	K2	K3	P1	S1					

L-Shaped

Code	Part Number	Applicable Pipe Dia.	Pipe Body Number of Links	Connector Selection (See table 1 above)		Pipe Body Number of Links	Nozzle Selection (See table 2 above)											
				Threaded	Male Valve/Female Valve		X Direction	Y Direction	H1	H2	H3	K1	K2	K3	P1	P2	S1	R1
J-XWY11	2(Ø6.3)	0~30	0~20	1(R1/8)	2(R1/4)	2(Rc/R1/4)	H1	H2	H3	K1	K2	K3	P1	P2	S1	R1	R2	
J-XWY12	3(Ø9.5)			3(R3/8)	4(R1/2)	4(Rc/R1/2)	H1	H2	H3	K1	K2	K3	P1	S1				
J-XWY13	4(Ø12.7)			4(Rc/R1/2)	H1	H2	H3	K1	K2	K3	P1	S1						

L-Shaped

Code	Part Number	Applicable Pipe Dia.	Pipe Body Number of Links	Connector Selection		Pipe Body Number of Links	Nozzle Selection										
				Threaded	Male Valve/Female Valve		X Direction	Y Direction	H1	H2	H3	K1	K2	K3	P1	P2	S1
J-XWY11	2(Ø6.3)	0~30	0~20	1(R1/8)	2(R1/4)	2(Rc/R1/4)	H1	H2	H3	K1	K2	K3	P1	P2	S1	R1	R2
J-XWY12	3(Ø9.5)			2(R1/4)	2(Rc/R1/4)	H1	H2	H3	K1	K2	K3	P1	P2	S1	R1	R2	

J-XWY11-2-X5-1-Y10-H1



Discount price	
Per Price	1~3 4~
Price	100% Additional quotation

